



*SYWELL Information (AFIS)

122.705

RNAV	Final Apch Crs 204°	BK21F MANDATORY 2300' (1880')	LNAV DA/MDA(H) 920' (500')	Apt Elev 424' Rwy 420'	2500 090°→←270° 2200↑2000 360° MSA ARP
MISSED APCH: Continuous climb to 2500'. Initially climb STRAIGHT AHEAD to BKMØ3, then turn RIGHT direct to BKMØ4 then to DOGOS.					
RNP Apch	Alt Set: hPa	Rwy Elev: 15 hPa	Trans level: By ATC	Trans alt: 6000'	
Procedure restricted to MAX 150 KT.					

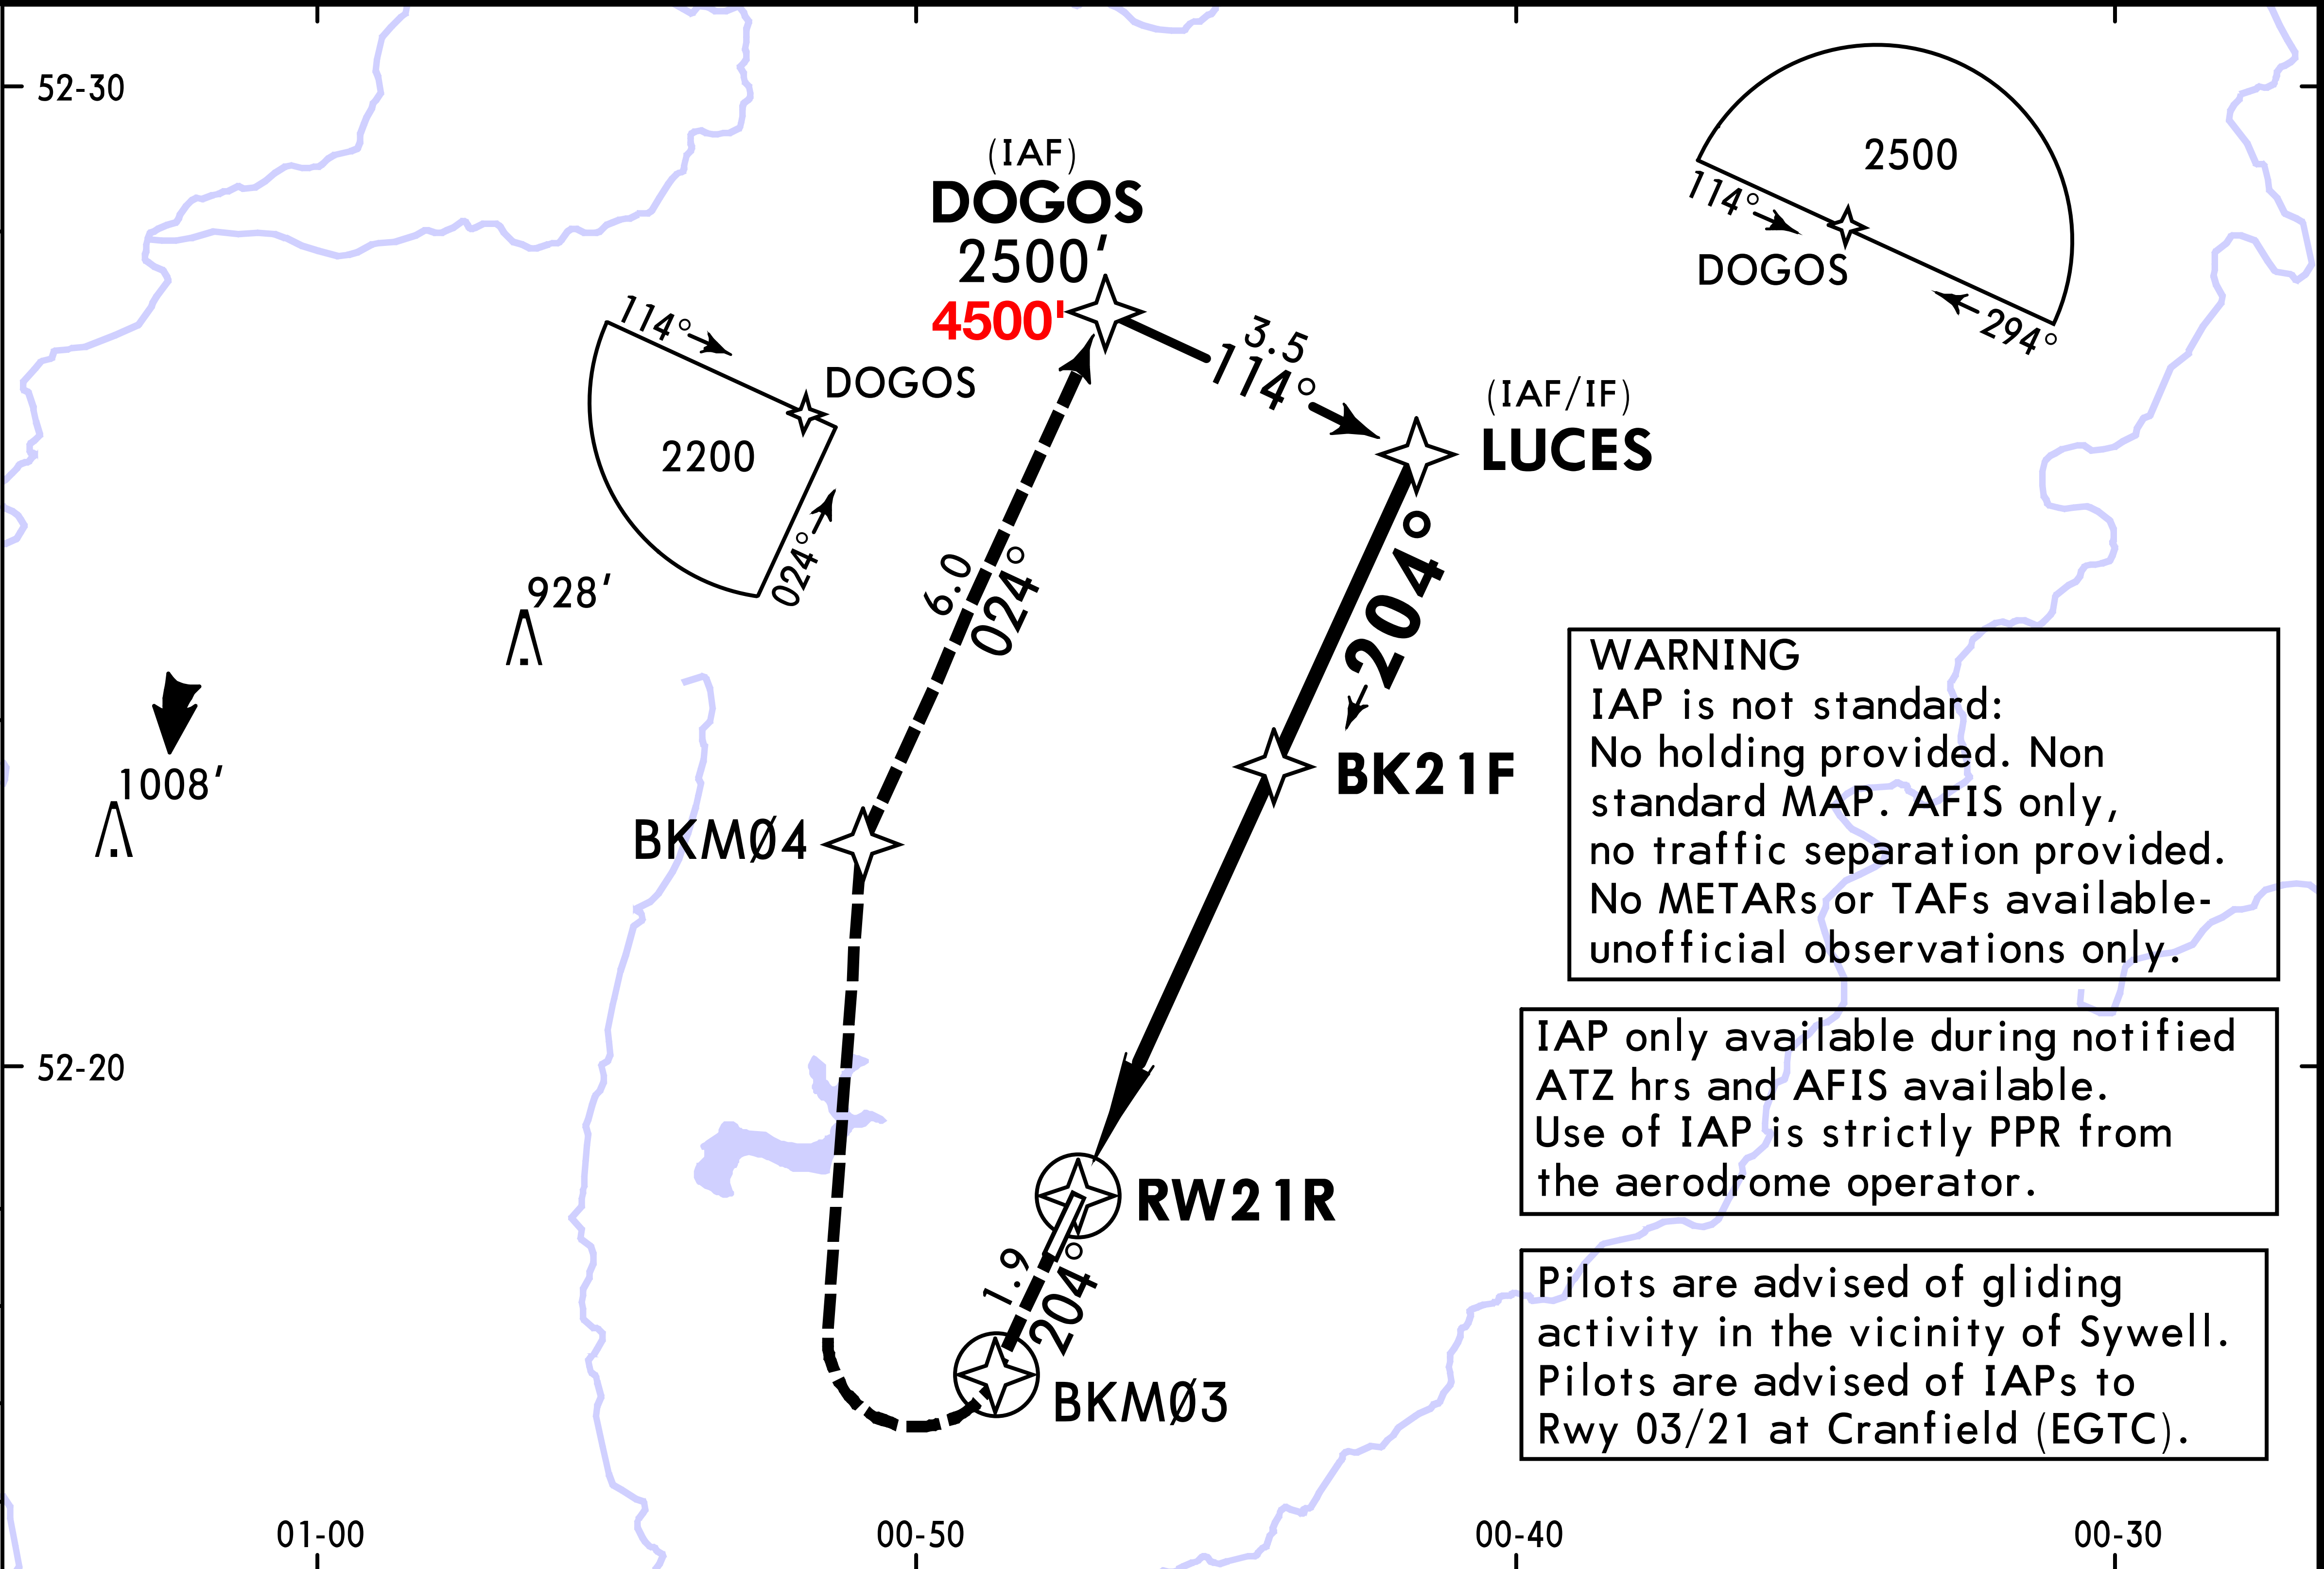

DIST to RW21R	2.0	3.0	4.0	5.0
ALTITUDE	1200'	1570'	1950'	2300'

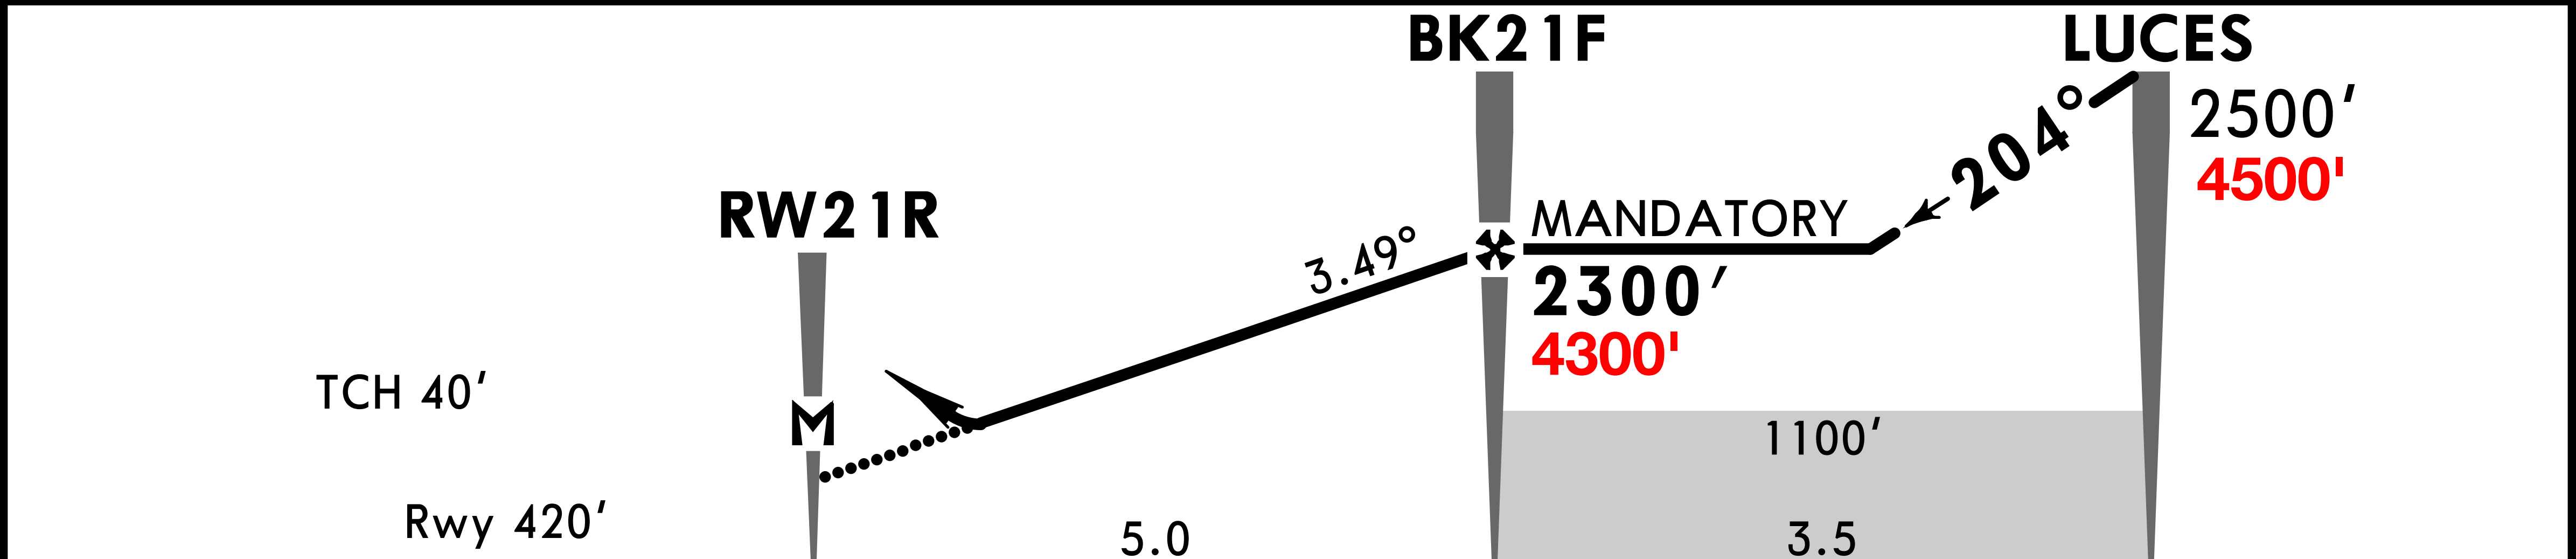

Gnd speed-Kts	70	90	100	120	140	160	APAPI-L	2500' ↑	BKMØ3 ↻ RT
Descent Angle 3.49°	432	556	618	741	865	988			
MAP at RW21R									

Standard STRAIGHT-IN LANDING RWY 21R							CIRCLE-TO-LAND		
LNAV CDFA 2920' DA/MDA(H) 920' (500')							Max Kts	MDA(H)	VIS
A	RVR 1500m						100	930' (506')	1500m
B							135	930' (506')	1600m
C	NOT APPLICABLE						C	NOT APPLICABLE	
D							D		