

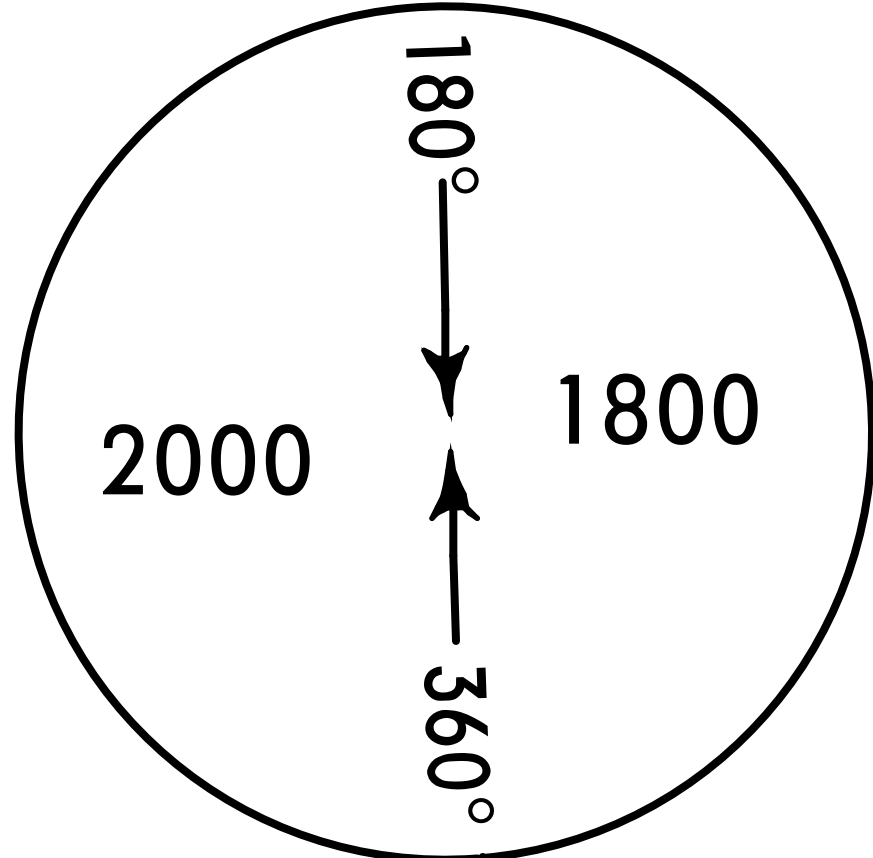


*ATIS		*CAMBRIDGE Approach		*CAMBRIDGE Tower		
134.605		120.965		125.905		
RNAV	Final Apch Crs 050°	SC05F MANDATORY 1600' (1564')	LNAV/VNAV DA(H) 660' (624')	Apt Elev 47'	Rwy 36'	
MISSED APCH: Climb STRAIGHT AHEAD to 1600', then climbing turn RIGHT to Lctr to hold at 2000', or as directed. MAX 210 KT. Revert to conventional navigation by reaching 1000'.						
RNP Apch.	Alt Set: hPa	Rwy Elev: 1 hPa	Trans level: By ATC	Trans alt: 6000'		
1. CAM Lctr required for Missed Apch. 2. Minimum temperature -15°C. 3. WARNING: Possible turbulence in touch-down area. 4. Procedure restricted to MAX 210 KT.						

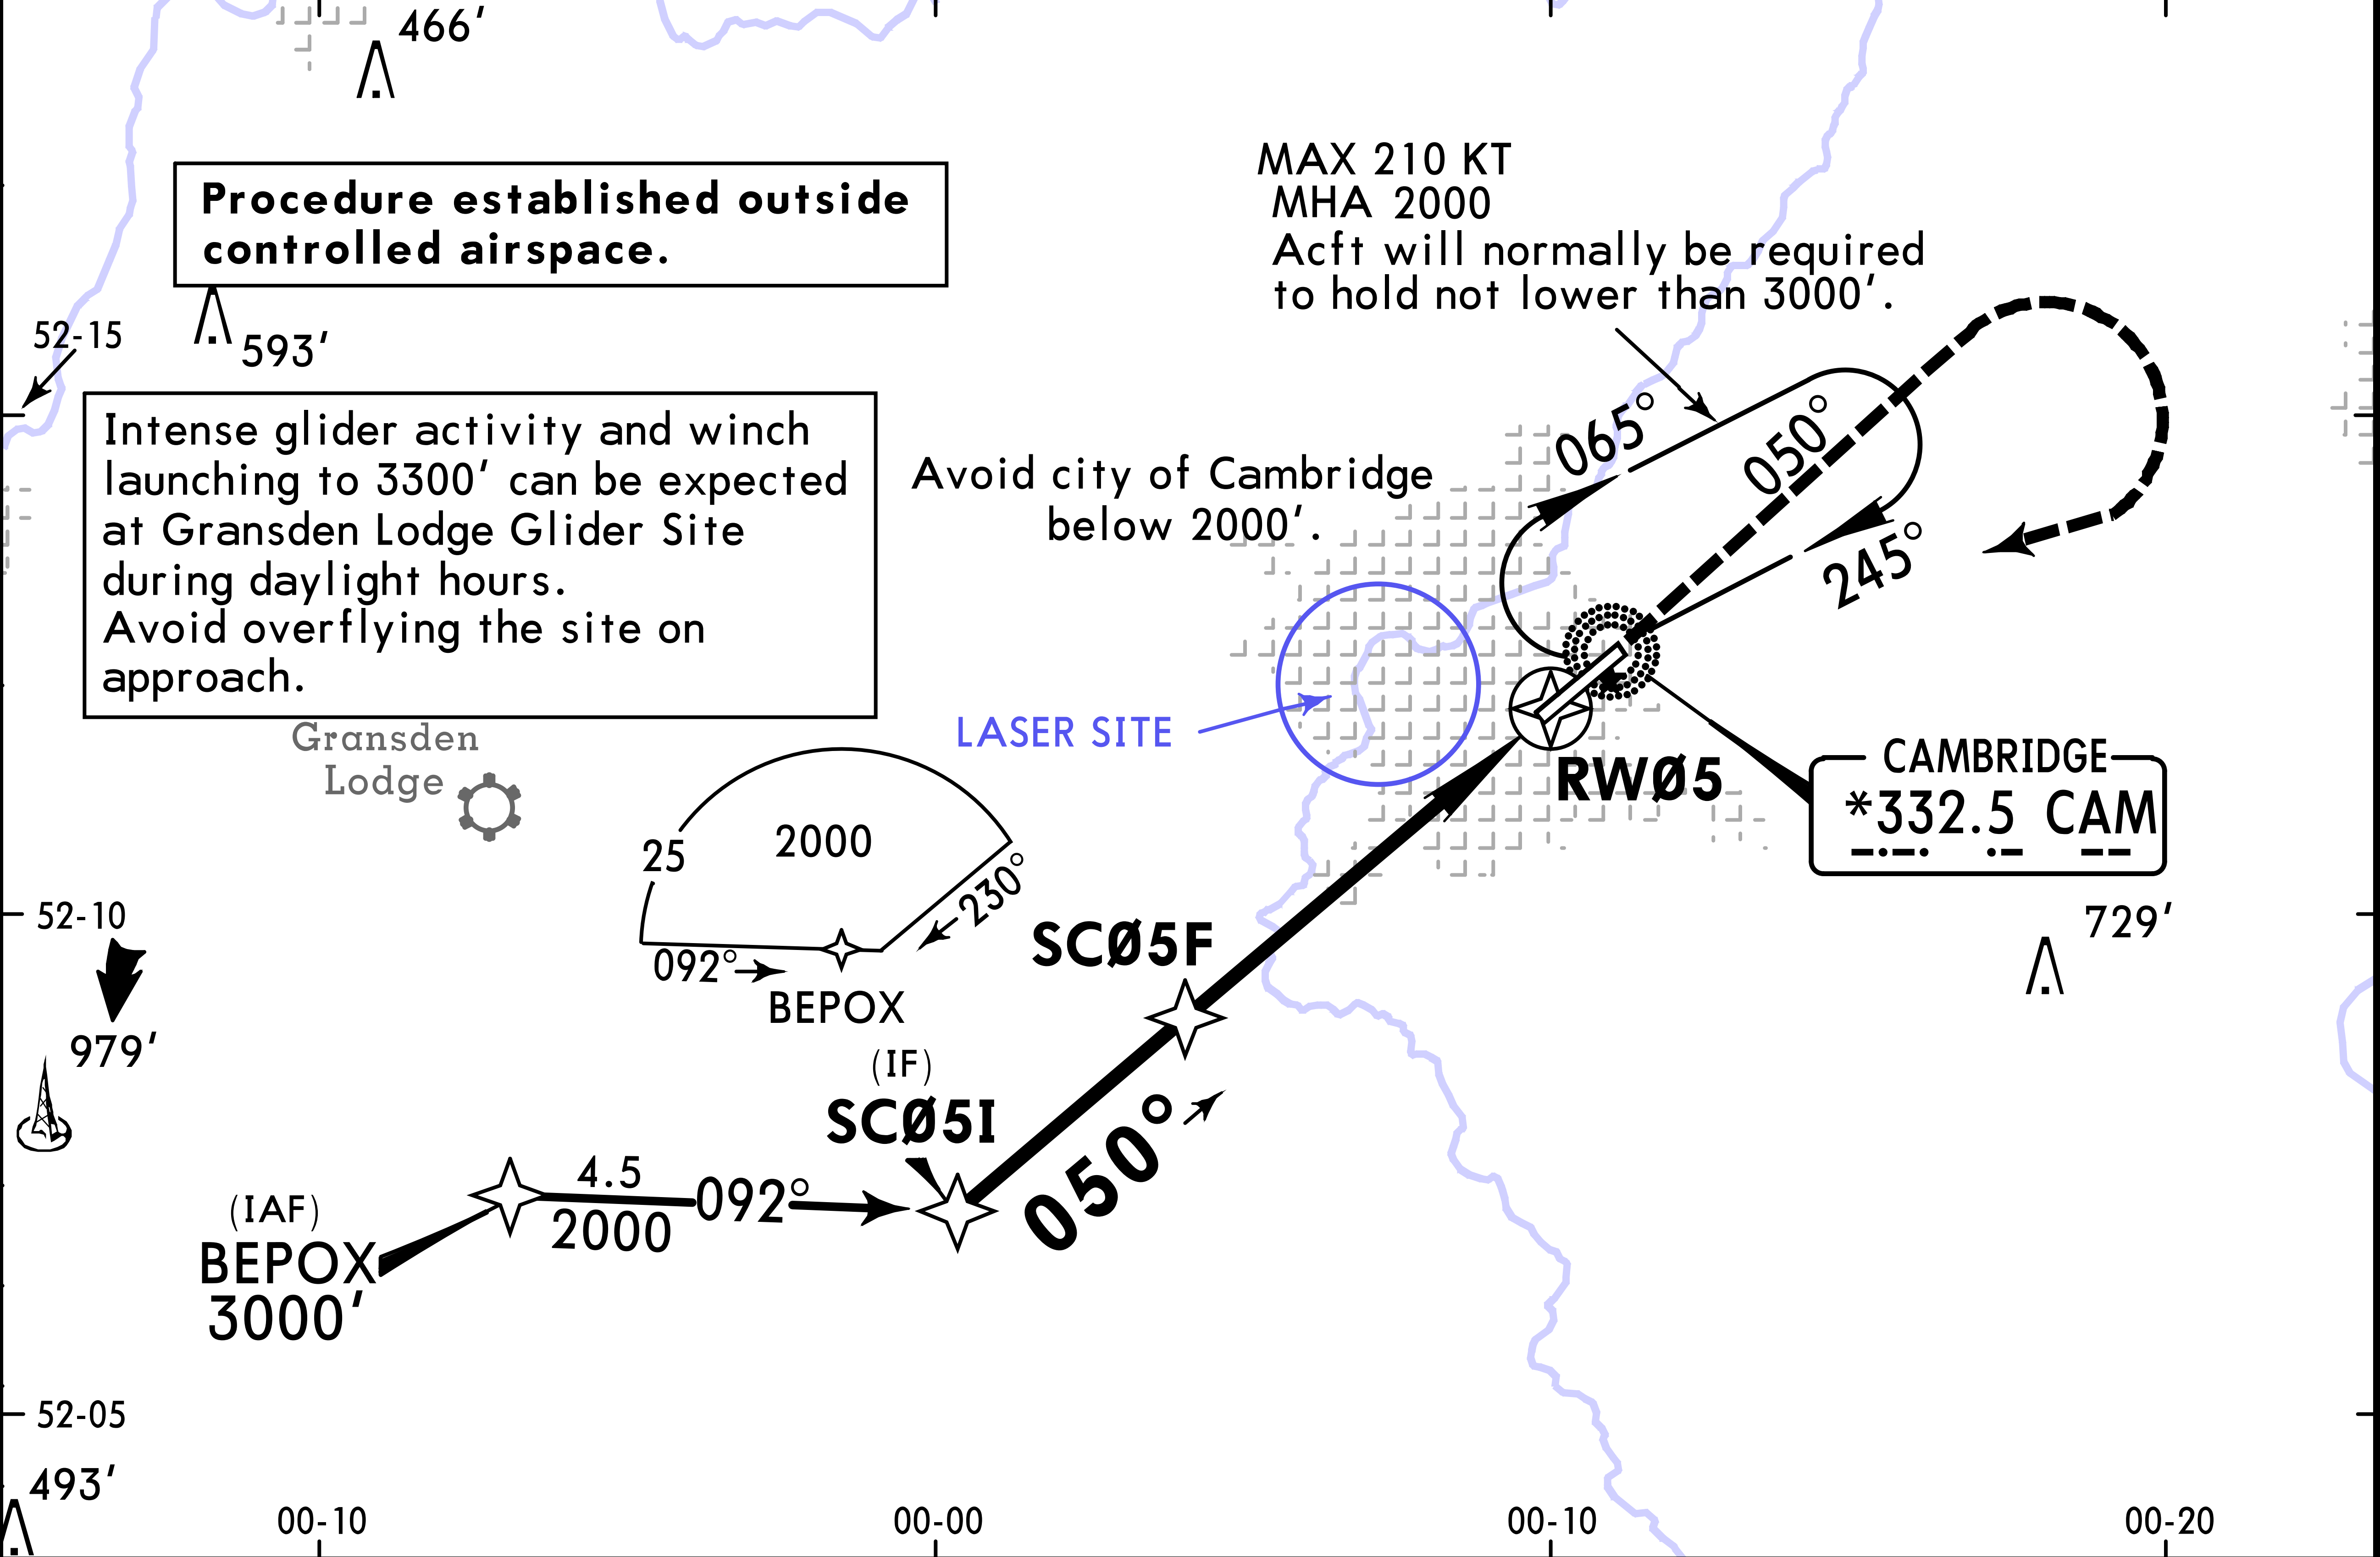

DIST to RW05	4.0	3.0	2.0
ALTITUDE	1360'	1040'	720'

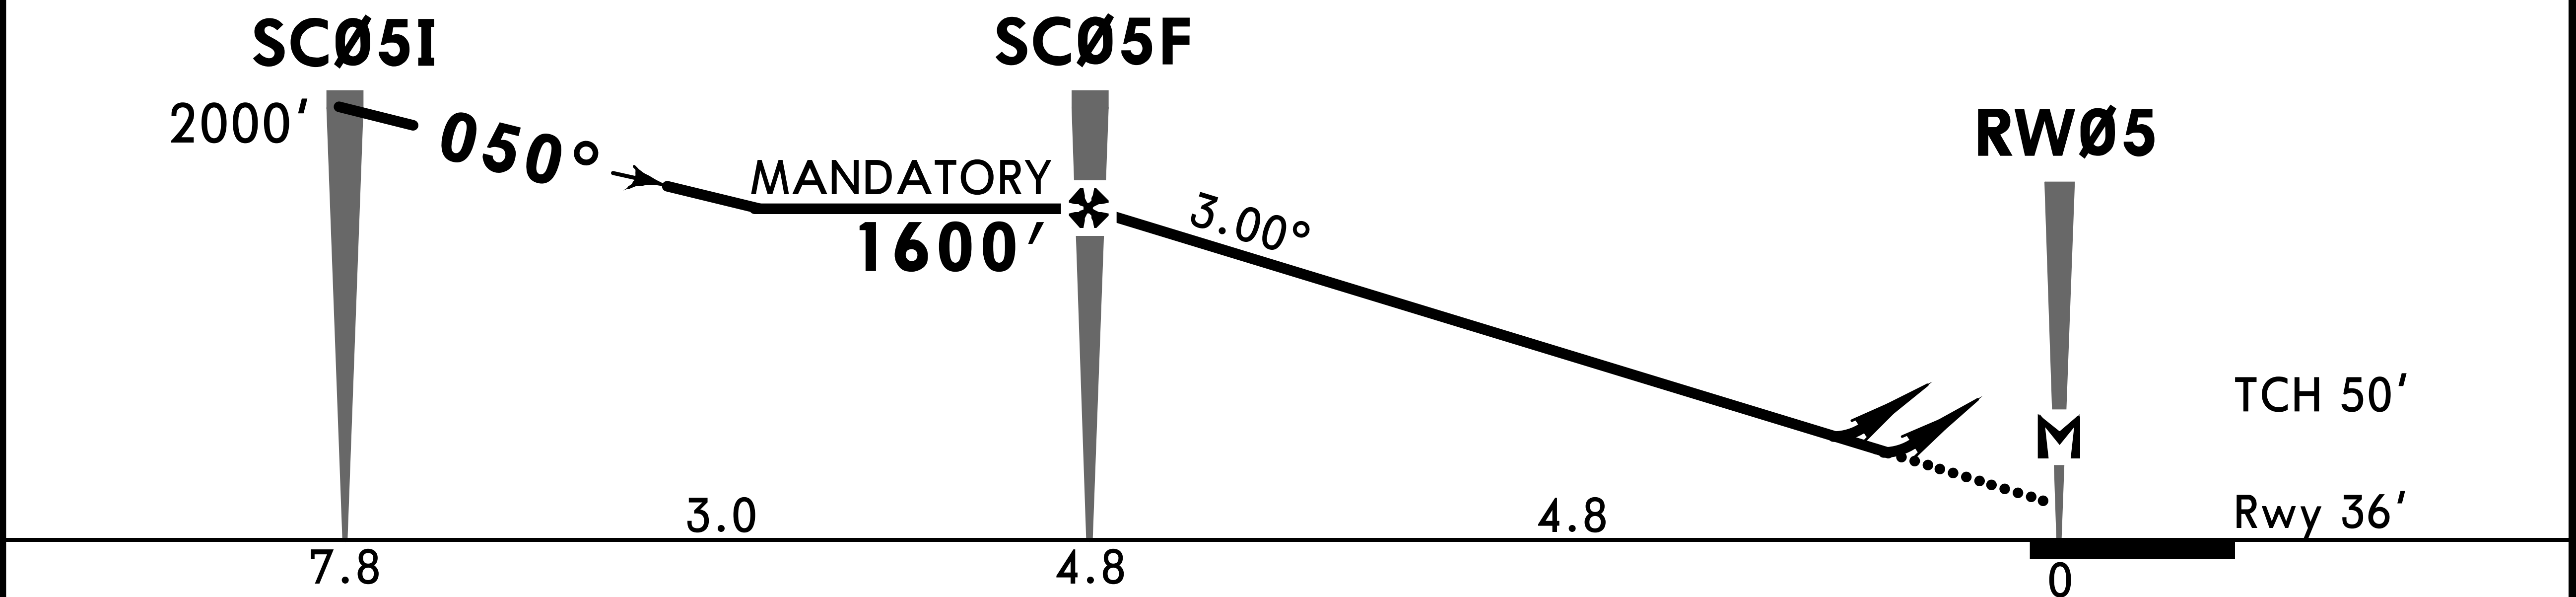

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI	210 KT MAX	1600' ↑
Descent Angle 3.00°	372	478	531	637	743	849			
MAP at RW05									

Standard STRAIGHT-IN LANDING RWY 05					CIRCLE-TO-LAND		
LNAV/VNAV		LNAV CDFA					
DA(H) 660' (624')		DA/MDA(H) 660' (624')					
	ALS out		ALS out	Max Kts	MDA(H)	VIS	
A	RVR 1500m	RVR 1500m		100	680' (633')	1500m	
B				135	710' (663')	1600m	
C	RVR 2400m	RVR 2400m		180	810' (763')	2400m	
D				205	1050' (1003')	3600m	