



ATIS		DONCASTER Approach (R)		DONCASTER Tower	
134.955		126.225		128.775	
RNAV	Final Apch Crs 018°	CNØ2F 2500' (2448')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 55' Rwy 52'	3200 1 MSA ARP
MISSED APCH: Continuous climb to 2500', STRAIGHT AHEAD to CNMØ1, then turn RIGHT to CNMØ2, CNMØ3 and FNY to join the hold or as directed. MAX 185 KT until CNMØ3.					
MISSED APCH WITH COMM FAILURE: Proceed as above and enter the hold at FNY.					
RNP Apch	Alt Set: hPa	Rwy Elev: 2 hPa	Trans level: By ATC	Trans alt: 5000'	
1. ACFT will be radar vectored to NUVRU. 2. Minimum temperature -10°C.					

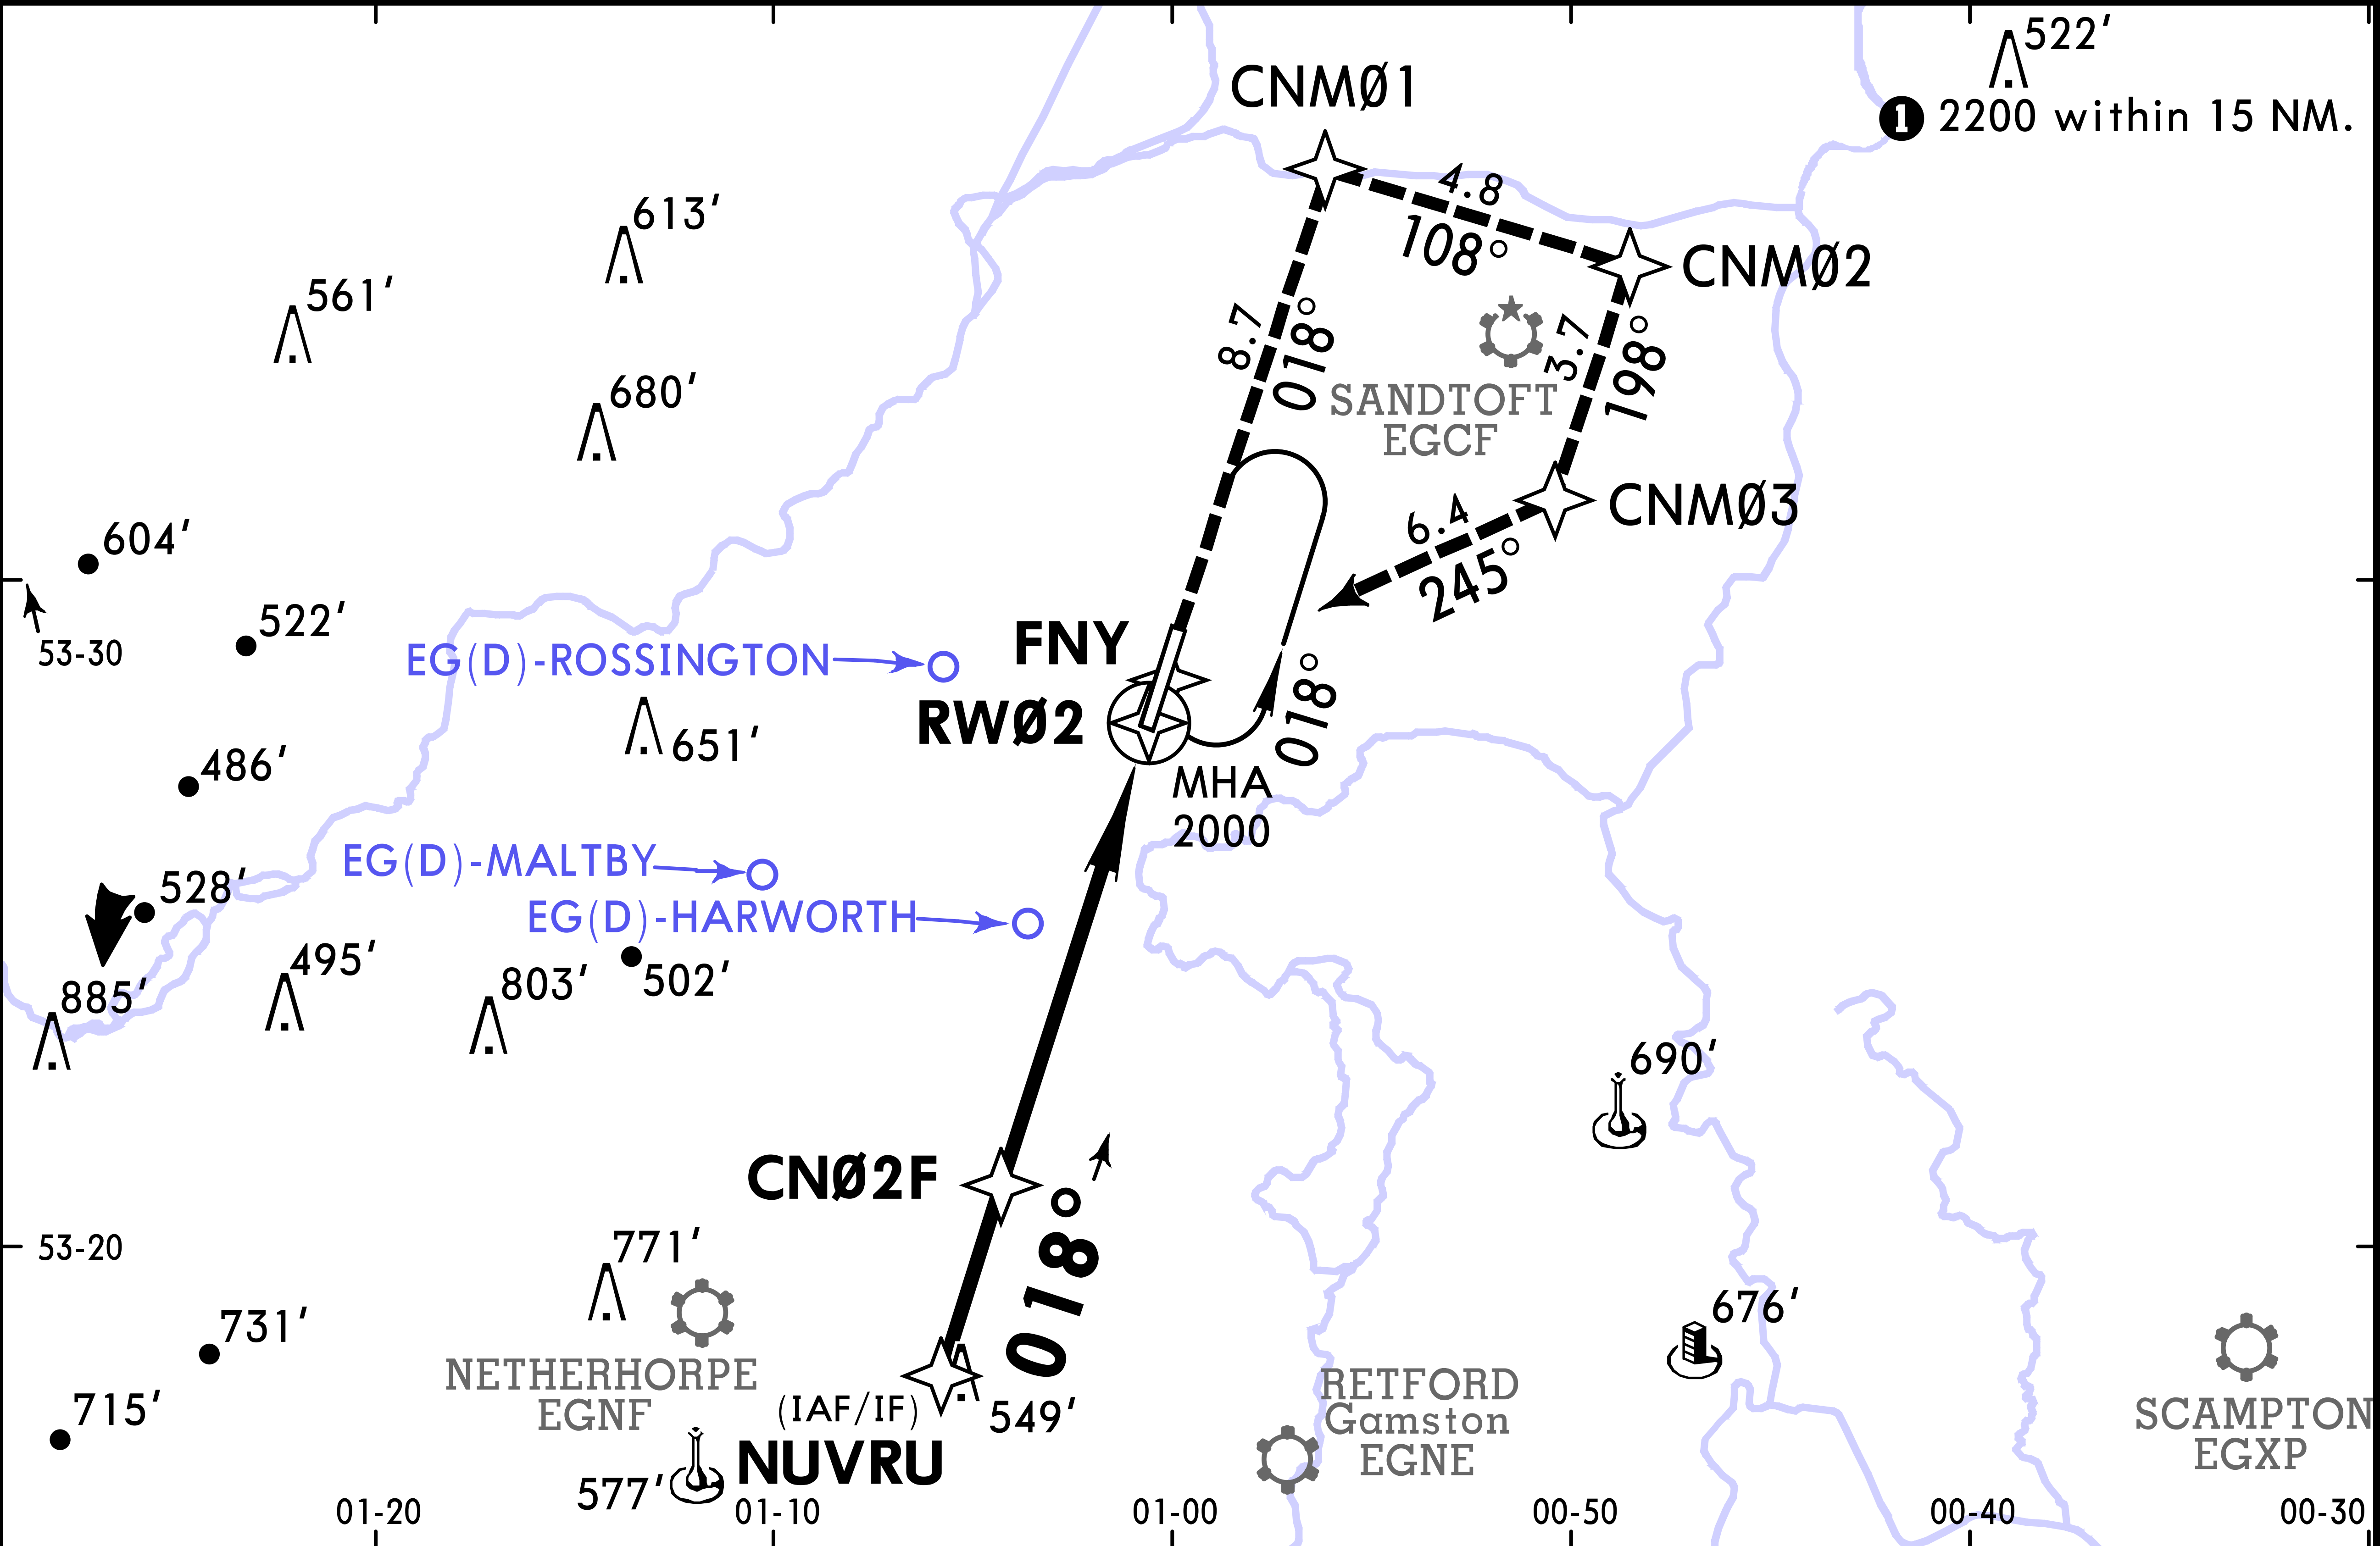

DIST to RWØ2	7.0	6.0	5.0	4.0	3.0	2.0	1.0
ALTITUDE	2410'	2080'	1750'	1420'	1090'	760'	430'

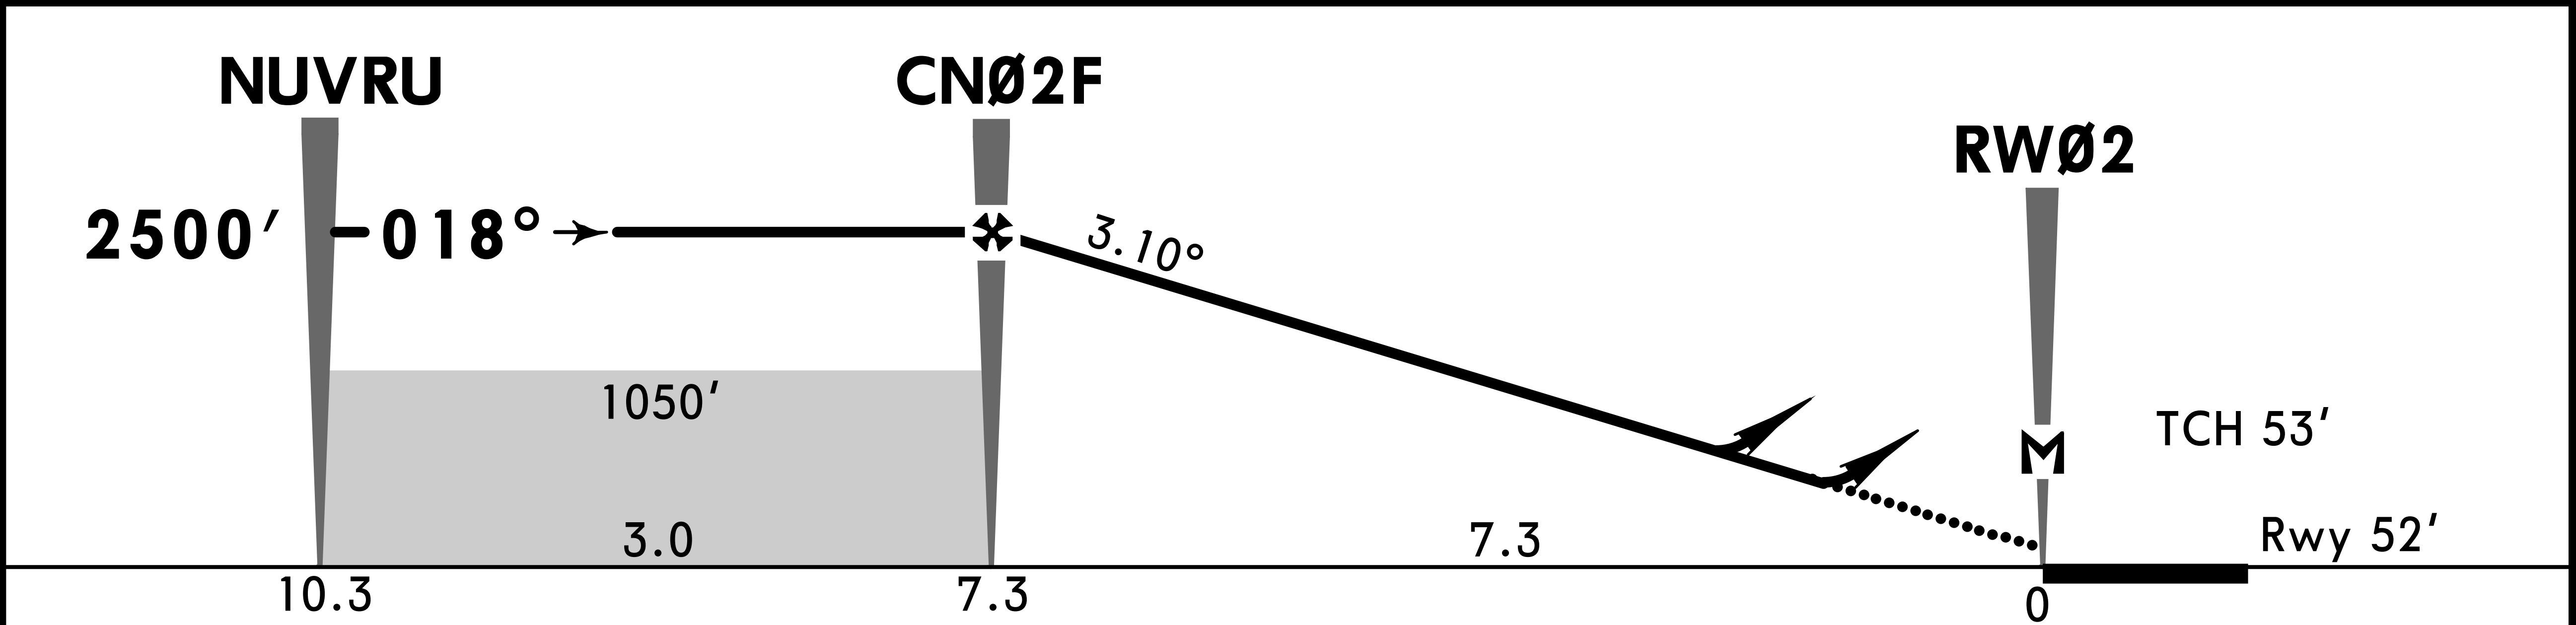

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI	185 KT MAX	2500' ↑	CNMØ1 ↑
Descent Angle	3.10°	384	494	548	658	768				
MAP at RWØ2										

Standard		STRAIGHT-IN LANDING RWY 02				CIRCLE-TO-LAND		
LNAV/VNAV		LNAV CDFA				Max Kts		
AB: 310'(258')		DA/MDA(H) 480'(428')					MDA(H)	VIS
DA(H) CD: 320'(268')								
		ALS out			ALS out			
A	RVR 800m	RVR 1300m	RVR 1500m			100	490'(435')	1500m
B						135	560'(505')	1600m
C	RVR 900m		RVR 1600m	RVR 2000m	180	760'(705')	2400m	
D					205	760'(705')	3600m	