



ATIS		DONCASTER Approach (R)		DONCASTER Tower	
134.955		126.225		128.775	
RNAV	Final Apch Crs 198°	CN2ØF 2500' (2474')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 55' Rwy 26'	3200 1 MSA ARP
MISSED APCH: Continuous climb to 2500', STRAIGHT AHEAD to CNMØ4, then turn LEFT to CNMØ5, CNMØ6 and FNY to join the hold or as directed. MAX 185 KT until FNY.					
MISSED APCH WITH COMM FAILURE: Proceed as above and enter the hold at FNY.					
RNP Apch	Alt Set: hPa	Rwy Elev: 1 hPa	Trans level: By ATC	Trans alt: 5000'	
1. ACFT will be radar vectored to IBIPA. 2. Minimum temperature -10°C.					

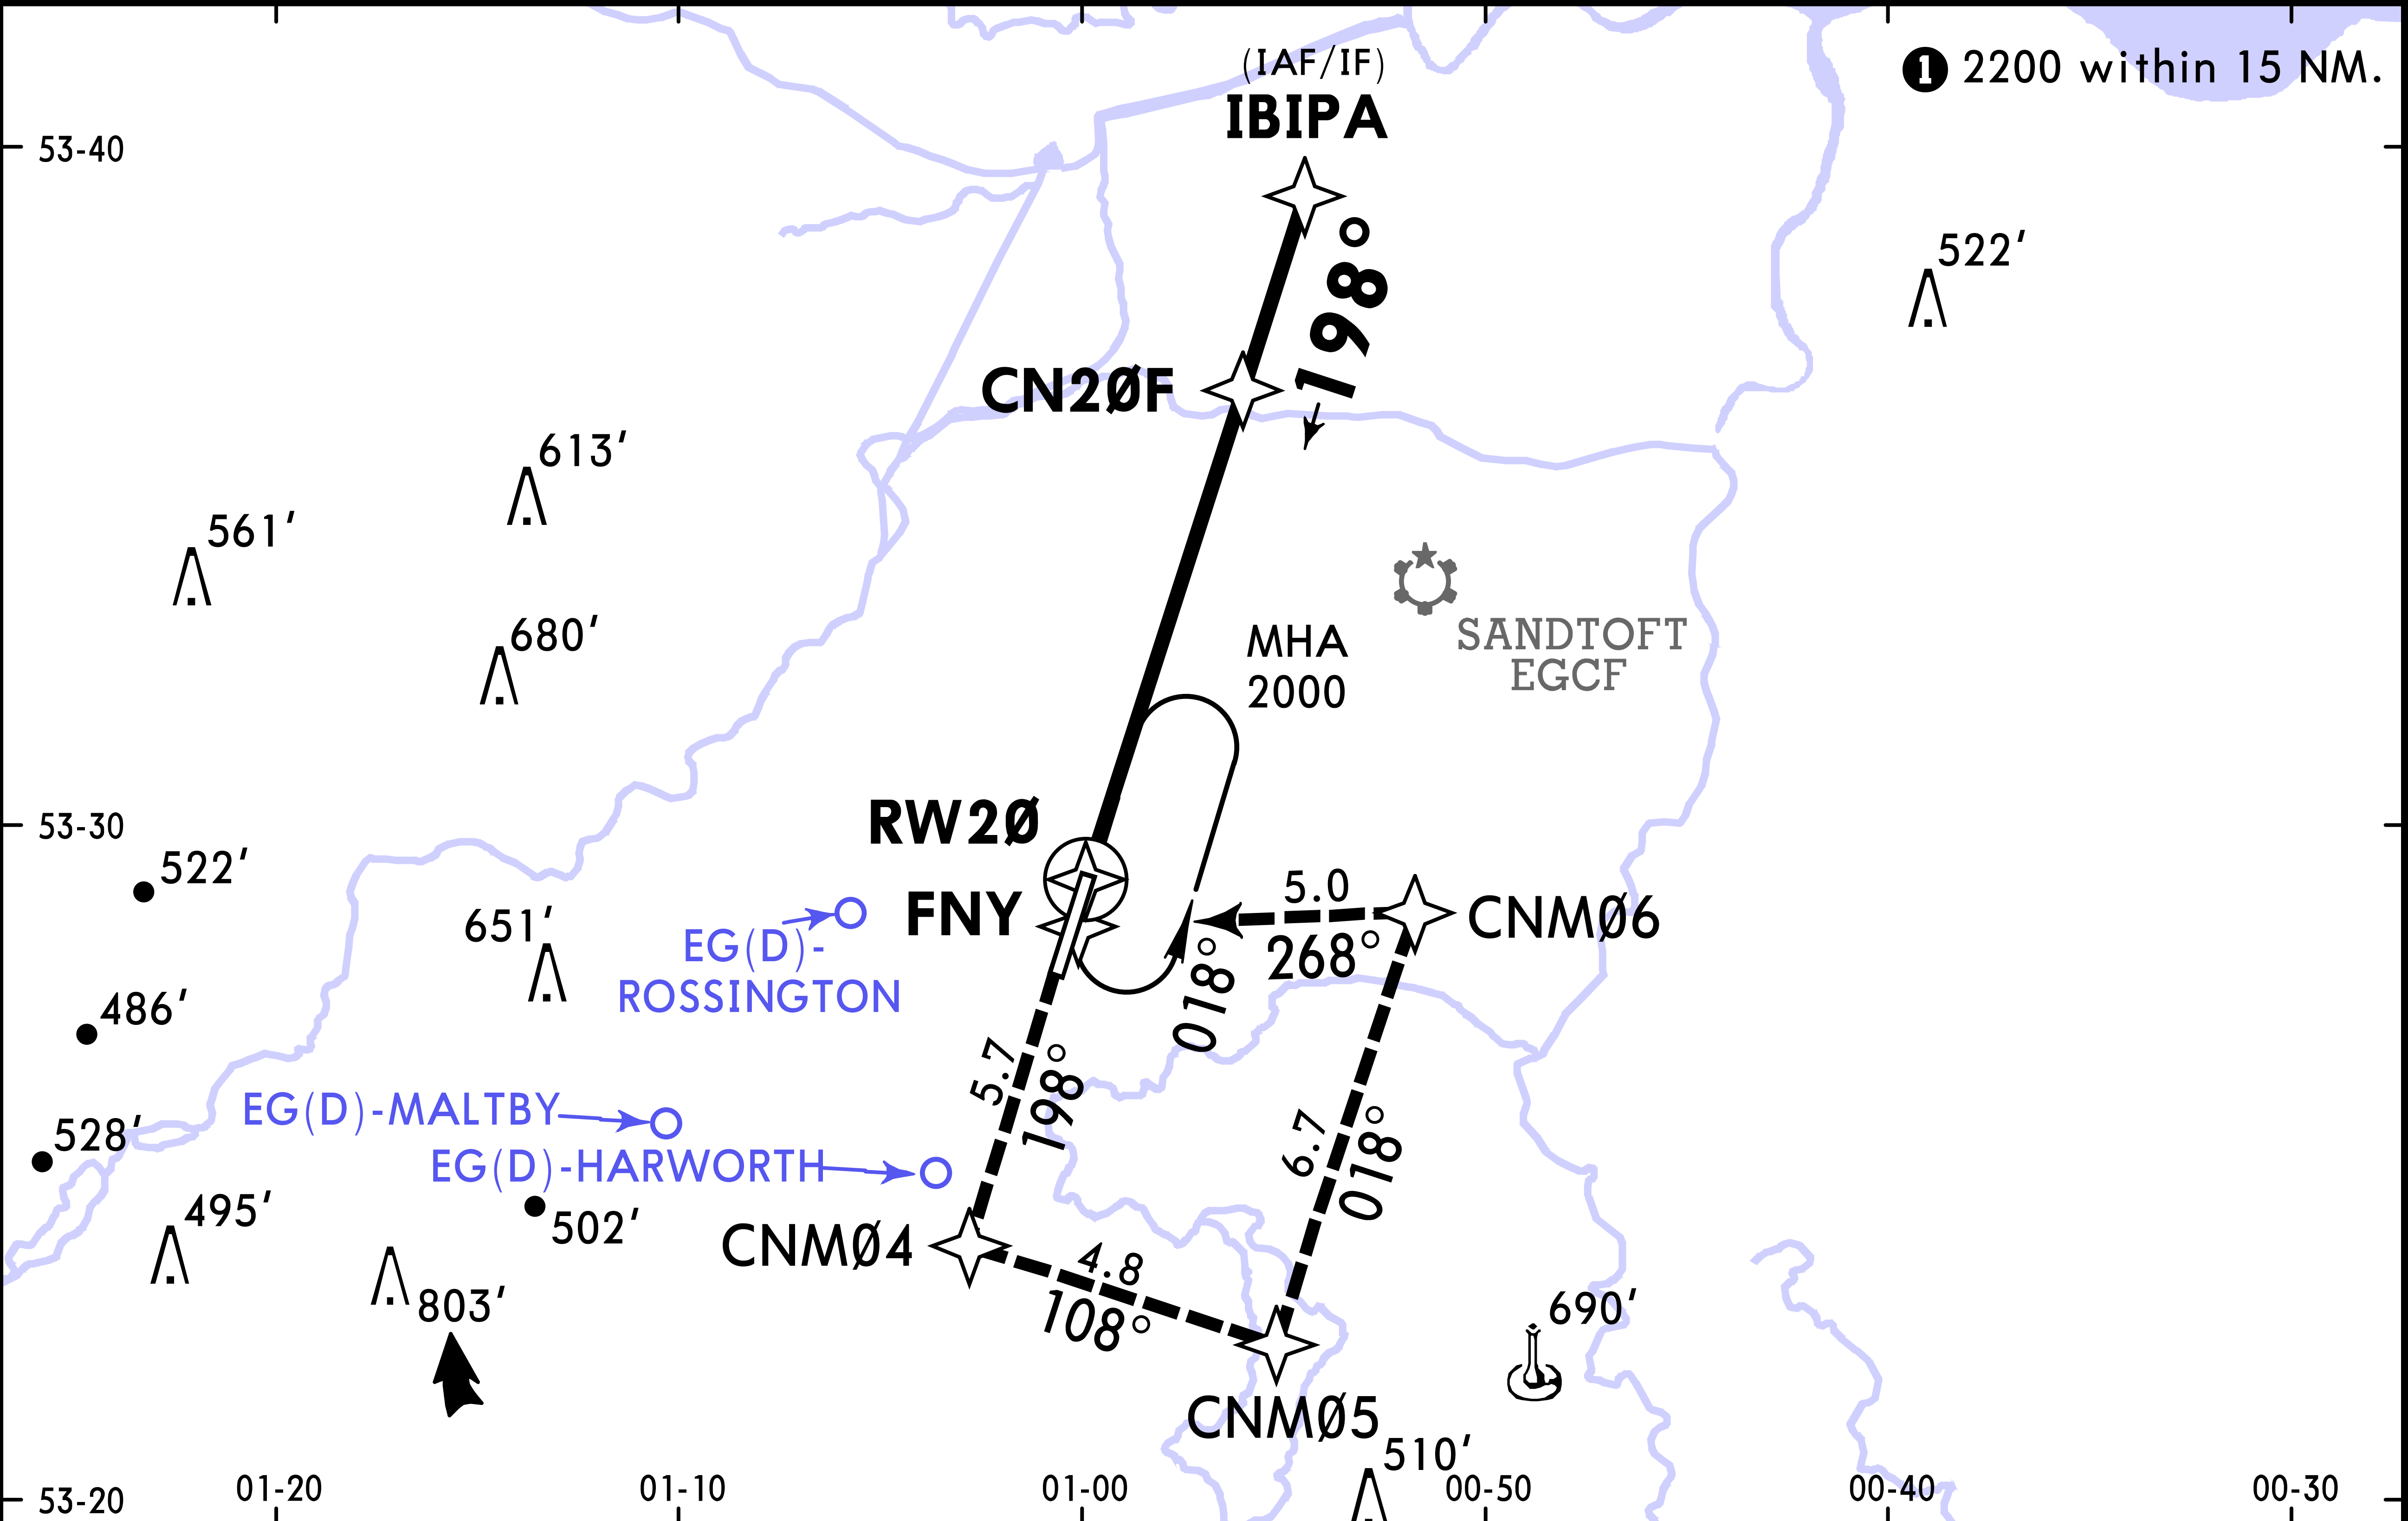

DIST to RW2Ø	1.0	2.0	3.0	4.0	5.0	6.0	7.0
ALTITUDE	400'	710'	1030'	1350'	1670'	1990'	2310'

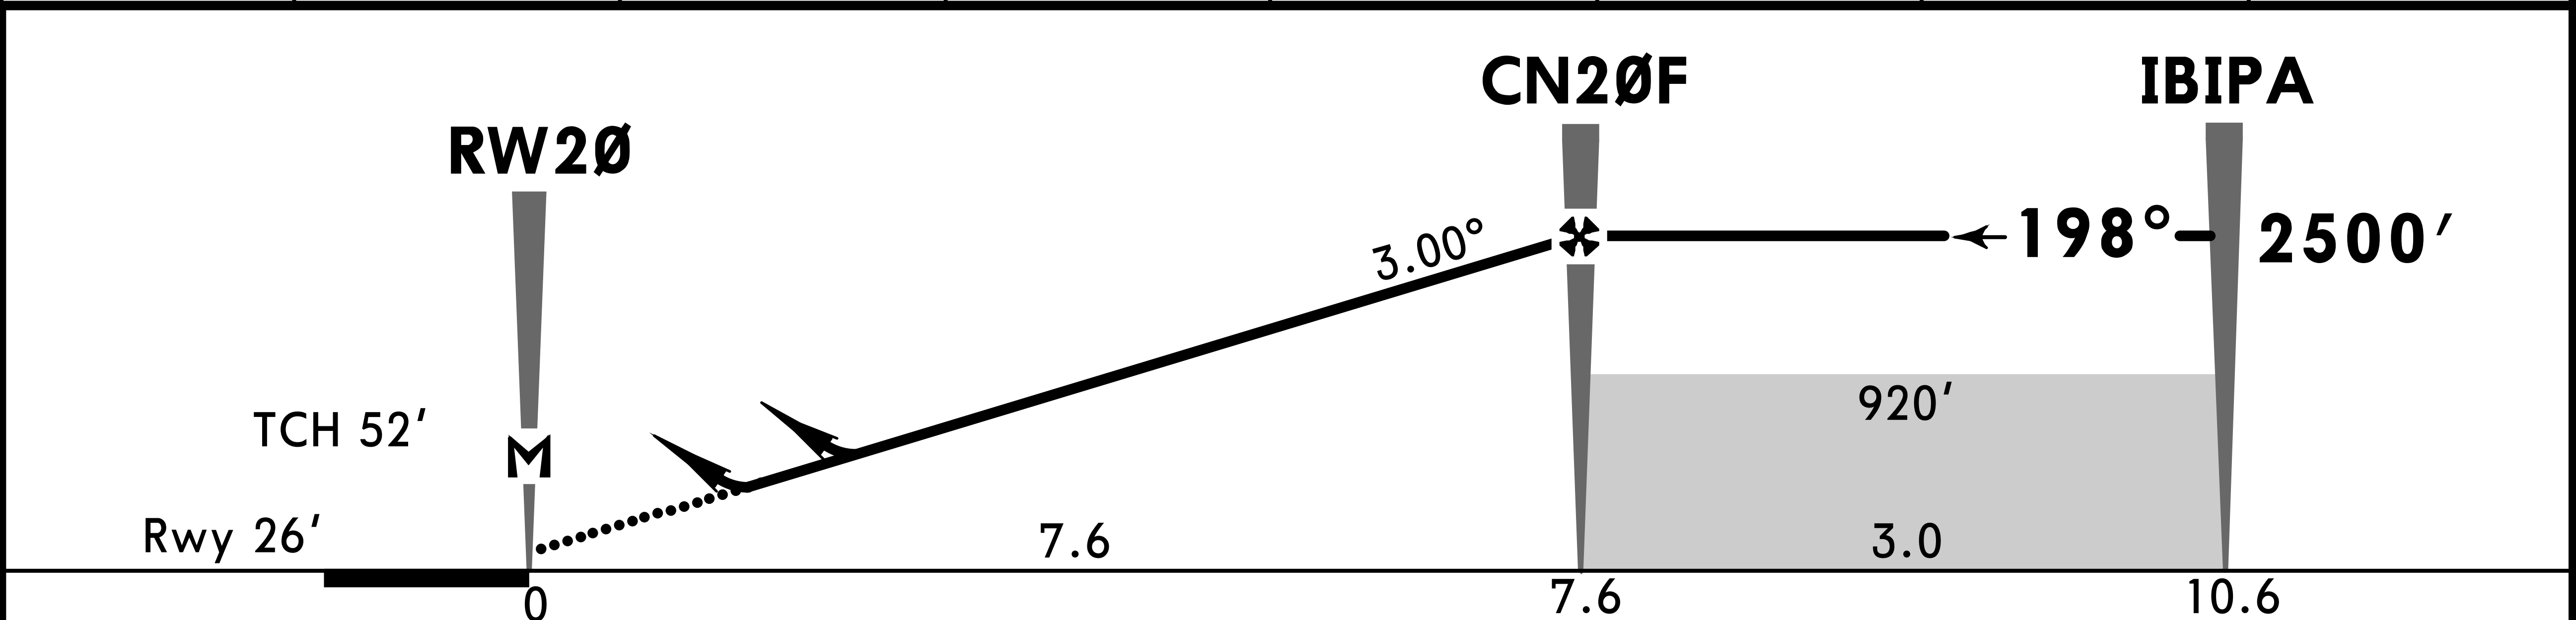

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	185 KT MAX	2500' ↑	CNMØ4 ↑
Descent Angle	3.00°	372	478	531	637	743				
MAP at RW2Ø										

Standard		STRAIGHT-IN LANDING RWY 20				CIRCLE-TO-LAND	
LNAV/VNAV		LNAV CDFA					
A: 280' (254') C: 300' (274')		DA/MDA(H) 390' (364')					
DA(H) B: 290' (264') D: 310' (284')							
		ALS out		ALS out		Max Kts	MDA(H) VIS
A	RVR 750m 1	RVR 1300m	RVR 1000m	RVR 1500m		100	480' (425') 1500m
B				RVR 1700m		135	560' (505') 1600m
C						180	760' (705') 2400m
D						205	760' (705') 3600m
1 With TDZ & CL & HUD: CAT A, B & C RVR 600m, CAT D RVR 650m.							