



*ATIS		*GLOSTER Approach(R)		*GLOSTER Tower	
127.480		128.555		122.905	
RNAV	Final Apch Crs 084°	BJ09F 1700' (1626')	LNAV DA/MDA(H) Refer to Minimums	Apt Elev 101' Rwy 74'	2800 MSA ARP
MISSED APCH: Continuous climb to 2800'. Intially climb STRAIGHT AHEAD at climb gradient required by MDA(H). At 1500' convert to conventional navigation and turn LEFT onto track 354° climbing to 2800', then turn LEFT to Lctr at 2800', or as directed. Do not turn before MAP.					
RNP Apch	Alt Set: hPa	Rwy Elev: 3 hPa	Trans level: By ATC	Trans alt: 3000'	
1. GST Lctr required for Missed Apch. 2. PROC ESTABLISHED OUTSIDE CONTROLLED AIRSPACE. 3. ILS DME reads zero at rwy 09 thresh.					

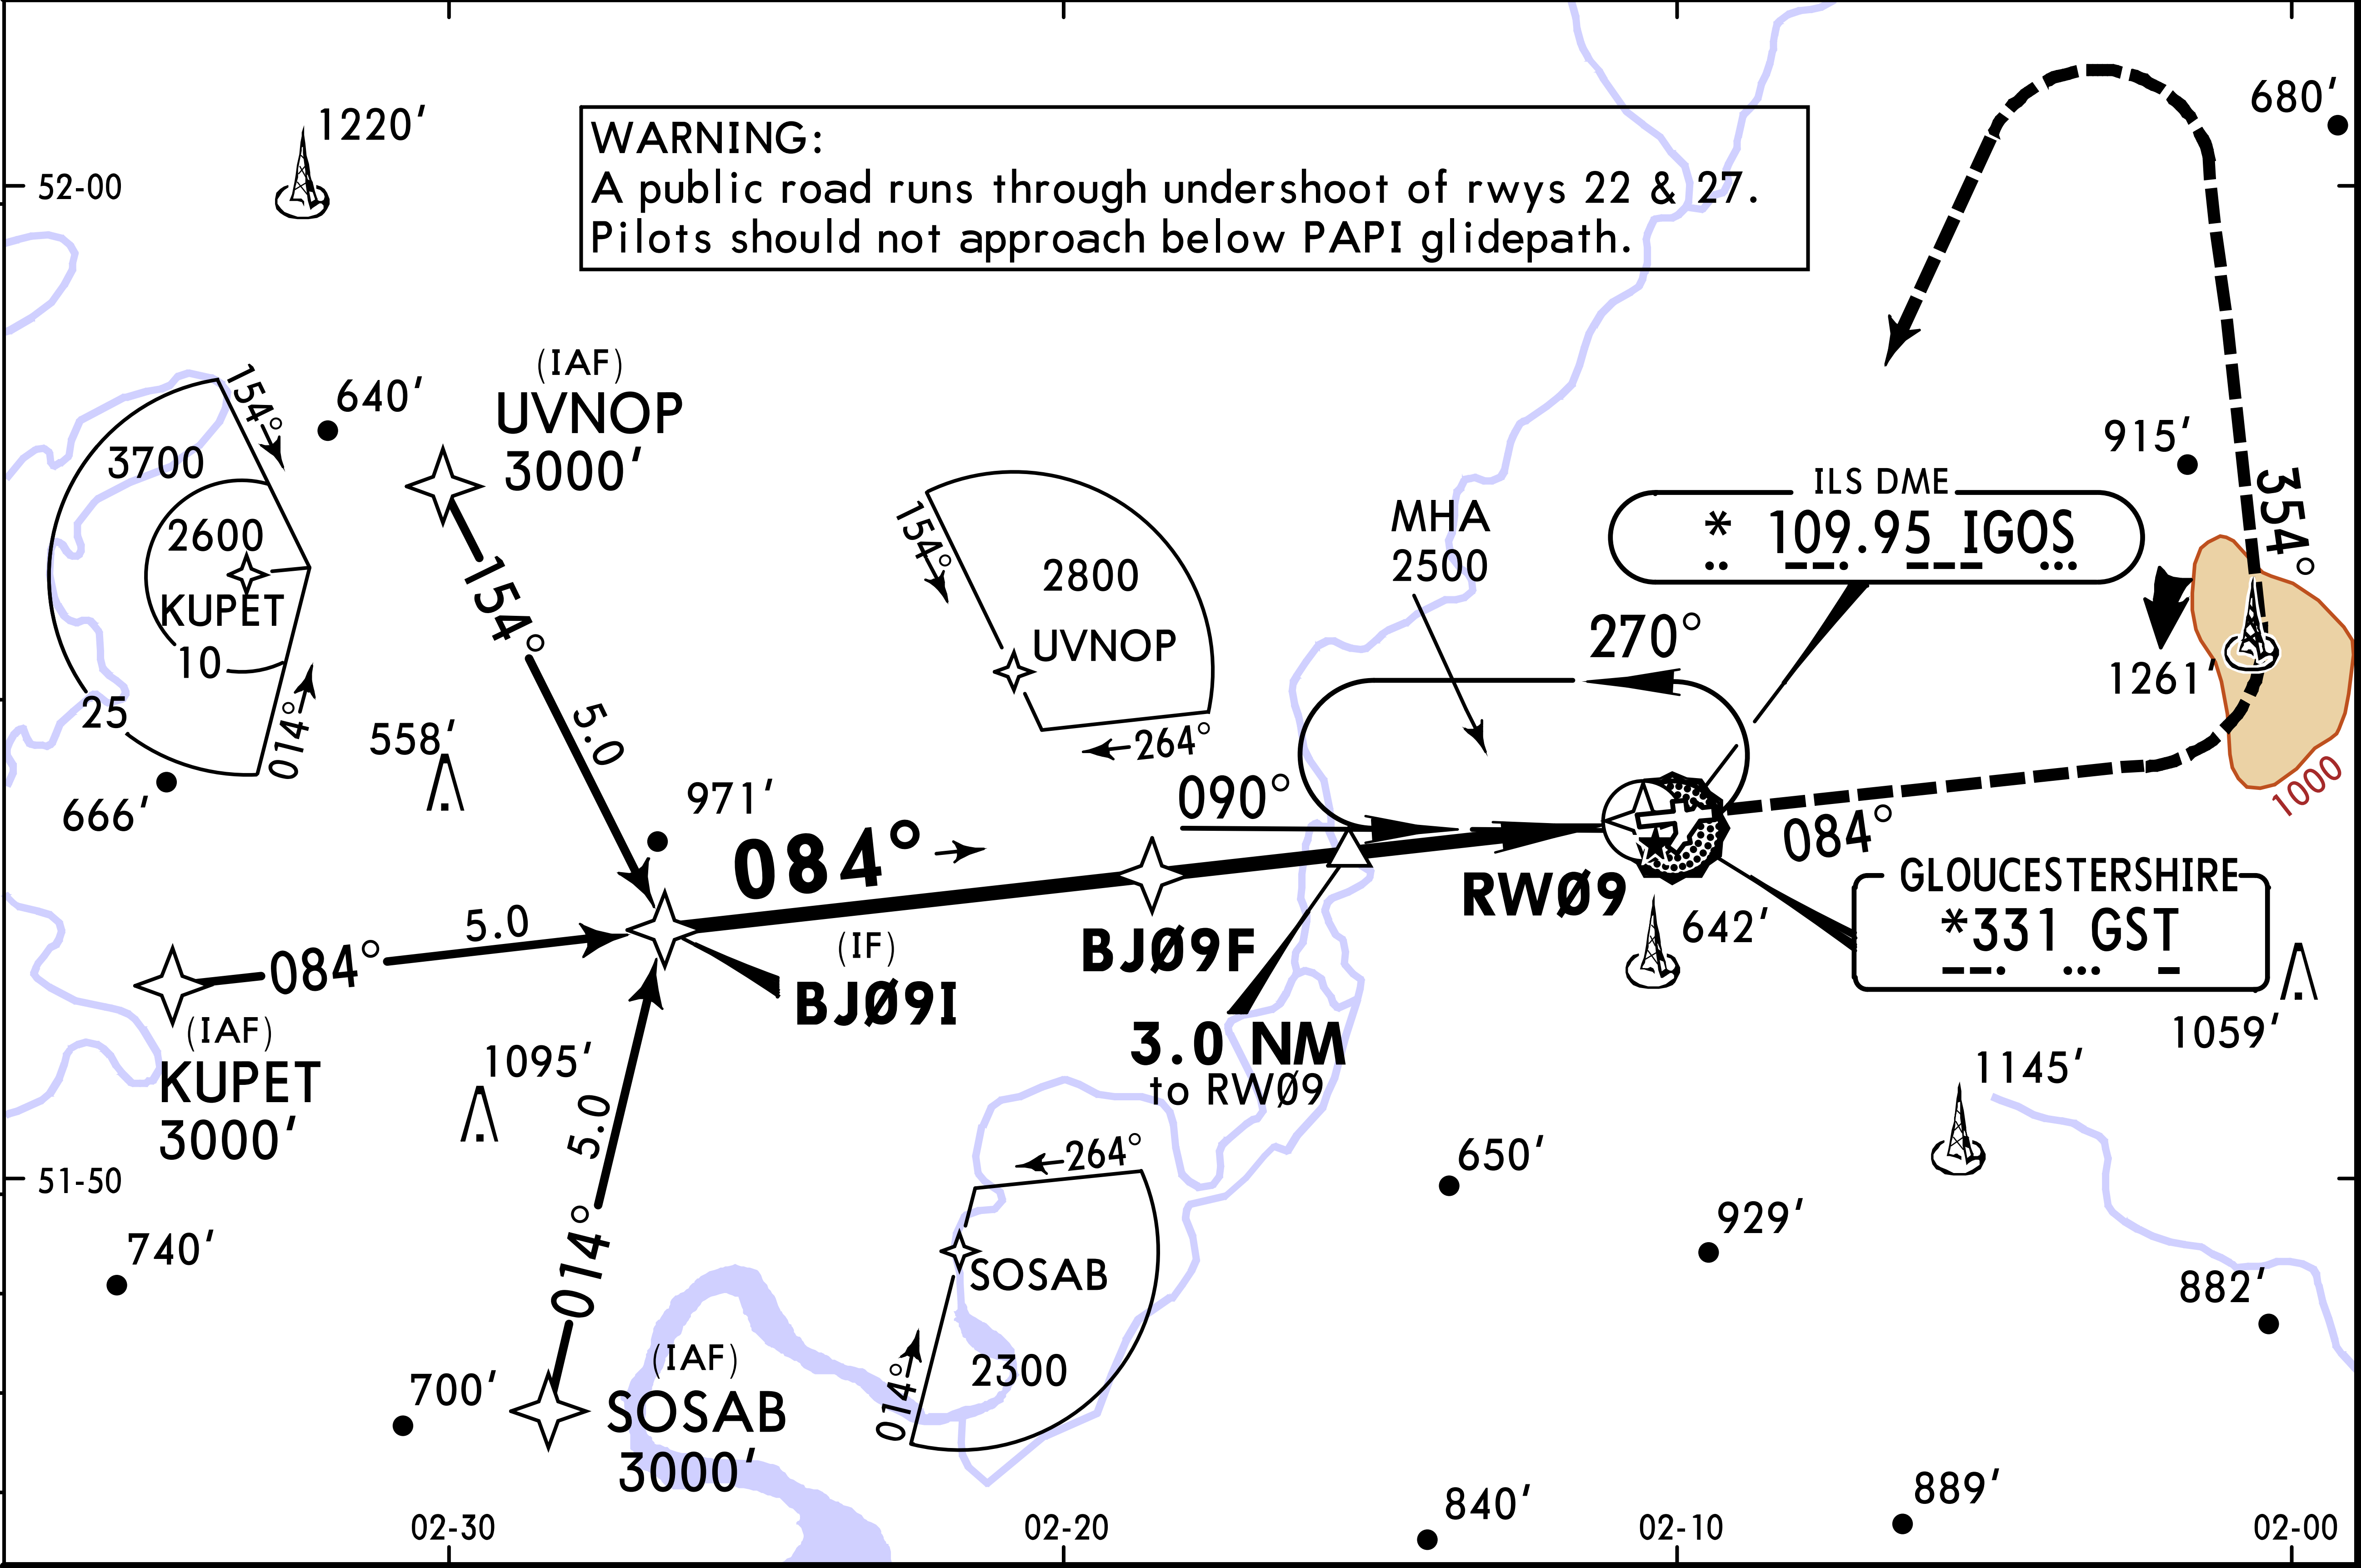

DIST to RW09	5.0	4.0	3.0	2.0
ALTITUDE	1700'	1400'	1080'	760'

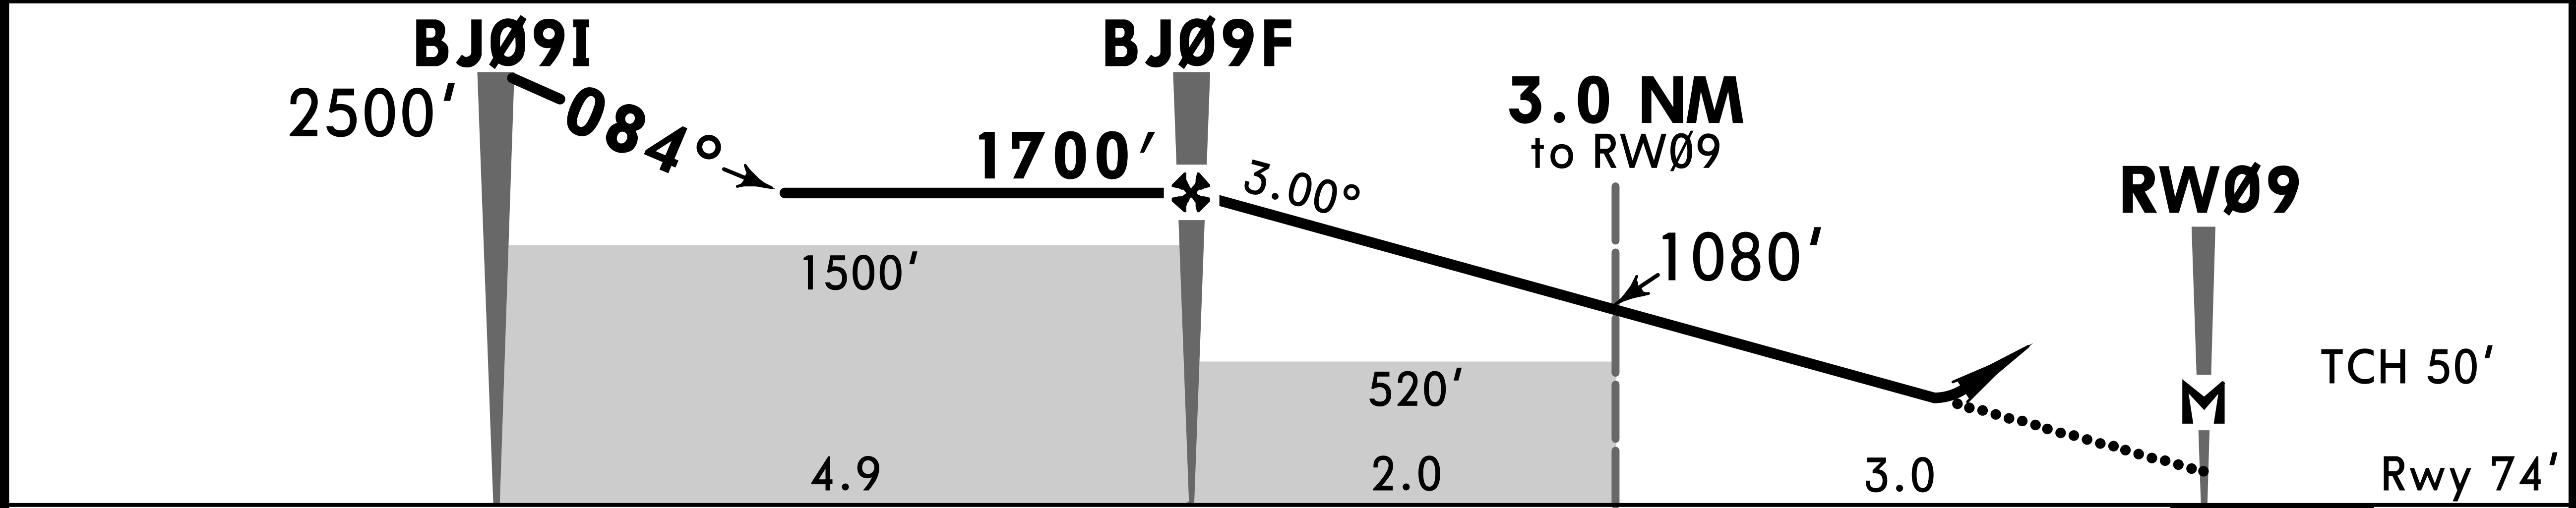

TO DISPL THRESH 9.9							5.0	0	
Gnd speed-Kts	70	90	100	120	140	160		HIALS 	1500' ↑
Descent Angle 3.00°	372	478	531	637	743	849		PAPI : PAPI (3.0°) : (5.5°)	
MAP at RWØ9									

Standard STRAIGHT-IN LANDING RWY 09					CIRCLE-TO-LAND					
LNAV					North of rwys 04/22 & 09/27					
Missed apch climb gradient mim 3.2%			Missed apch climb gradient mim 2.5%							
CDFA DA/MDA(H) 480' (406')			CDFA DA/MDA(H) 570' (496')							
ALS out			ALS out		Max Kts	MDA(H) _____VIS _____		MDA(H) _____VIS _____		
A	RVR 1500m			RVR 1500m		100	830' (729')	1500m	1000' (899')	1500m
B	RVR 1500m			RVR 1500m		135	830' (729')	1600m	1000' (899')	1600m
C	RVR 1700m	RVR 1900m	RVR 2100m	RVR 2300m	180	NOT APPLICABLE		1500' (1399')		2400m
D	NOT APPLICABLE				D	NOT APPLICABLE				